Catalog Number

04675-ZF

Capillary, Zero Flow, 75um ID by 1 meter. MICROSOLV Brand. 1 EA.

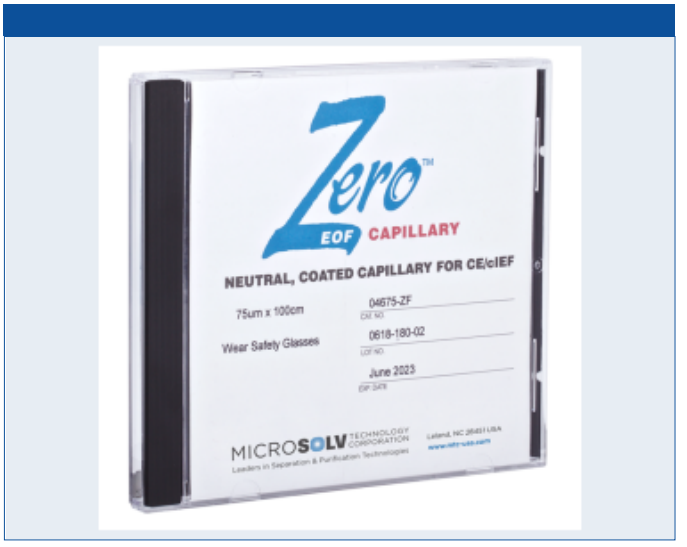

Additional Info

This fused silica capillary is clad with a polyimide outer coating. The inner capillary wall is covalently bonded with Linear Polyacrylamide to create a neutral (no charge) environment that does not conduct current. Therefore there is no Electro-Osmotic Flow (EOF) and ionized analytes will move to the anode or cathode respectively, only by their ion mobility.

This capillary is meant to be cut to your own desired length for your own Capillary Electrophoresis Instrument and is supplied without finished tips.

The Outer Diameter (OD) of this capillary is 365um.

MicroSolv Technology Corporation
9158 Industrial Blvd. NE, Leland, NC 28451
tel. (732) 380-8900, fax (910) 769-9435
Email: info@mtc-usa.com
Website: www.mtc-usa.com